

Sectional Door-Opening Details.


H = Opening Height.

B = Min. Clearance from Opening to Ceiling. 210mm

With Overhead Spring
 B = 210mm inclusive an electric operator
 C = Door Height + 510mm

C = Door Height + 750mm

With Rear Mounted Spring
 B = 100mm (+ 50mm
 for an electric operator)

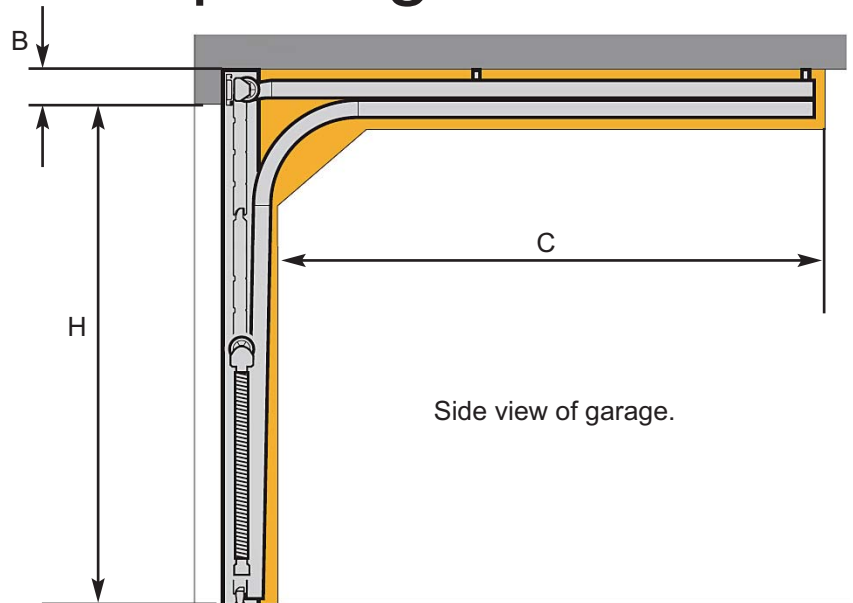

Note: Springs side mounted on doors up to 3050mm wide - Headroom required = 100mm (+50mm for electric operator)
 (For sectional Door Types, Styles and Sizes, refer to the Garador brochure)

Typical clearances Required (On the rear face of reveals)


W = Opening Width

H = Opening Height. (Lintel to floor)

A = Minimum side clearance. 90mm
 (125mm Preferred)

B = Minimum Underside of lintel to Ceiling 210mm

With Rear Mounted Spring
 B = 100mm

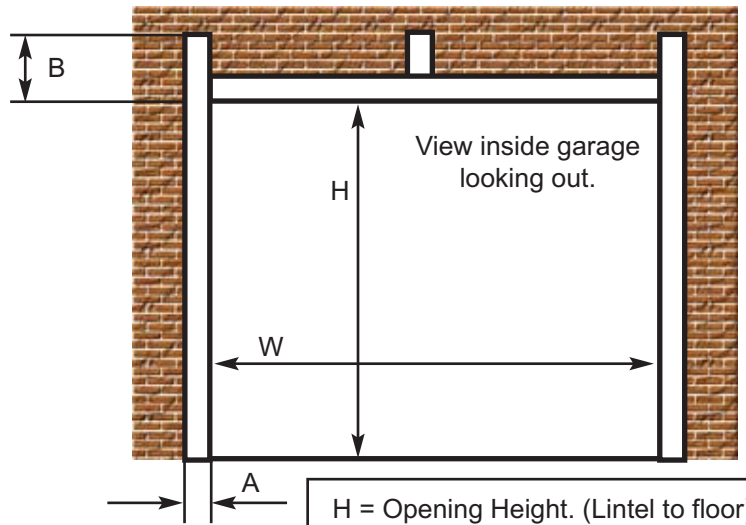

H = Opening Height. (Lintel to floor)

CUSTOMER SUPPLIED DETAILS

W =


H =

A =

B =

C =

Note: For electric operation use system R operators. Refer to brochure for details. For full technical information refer to the brochure or contact the Technical Services Dept. on Tel: 01935 443700

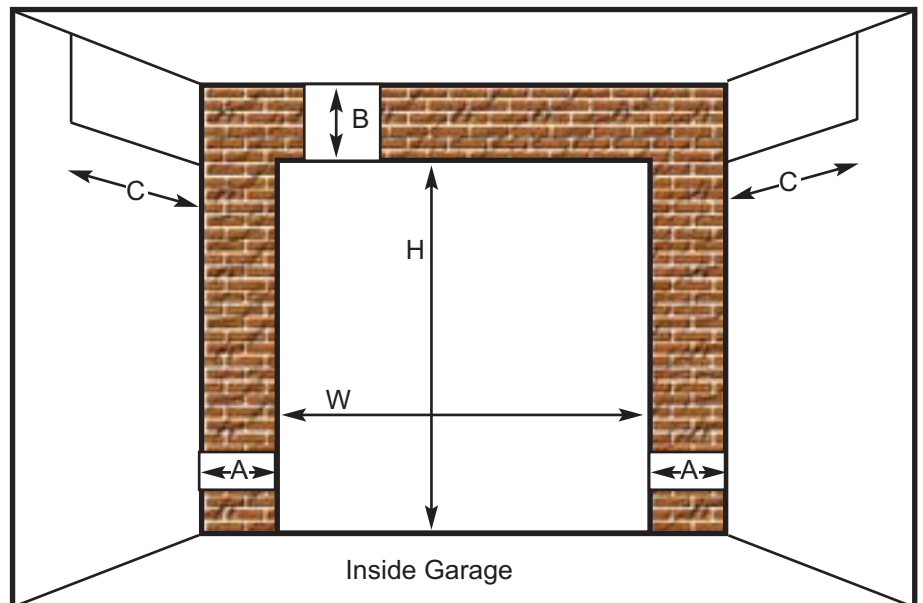

Cut downs only available in equal increments of 10mm and unavailable with the classic style.