


## Side Hung - Purpose Made Doors

Please ensure you have viewed and understood the Technical Data in the Garador Brochure before filling out this form


<p>Maximum Overall Frame Width = 2539 mm Minimum Overall Frame Width = 1930 mm (Georgian, Beaumont &amp; Cathedral Min. Width 2234mm) Maximum Overall Frame Height = 2196mm Minimum Overall Frame Height = 1890 mm (Georgian, Beaumont &amp; Cathedral Min. Height 1991mm)</p>
--

### Between Brickwork Fitting- Tick Box if Option Required

Plan View

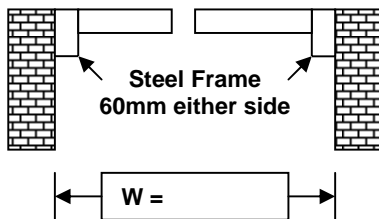

Side View

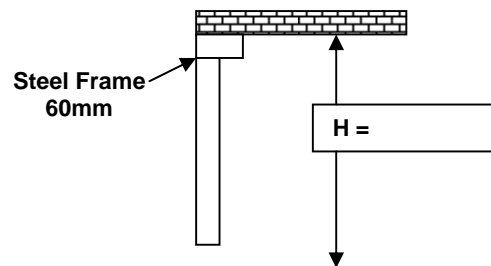


Please enter Brickwork opening Width (W) and Brickwork opening Height (H) in the boxes.


**NOTE- No clearance between side frame & brickwork has been allowed for. Garador recommend customer to allow 5mm clearance each side and at top, between frame and brickwork.**

### Behind Brickwork Fitting- Tick Box if Option Required

Plan View

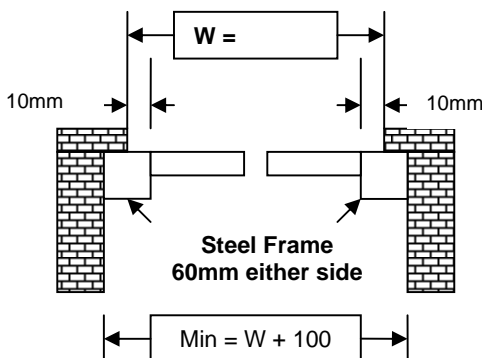

Side View

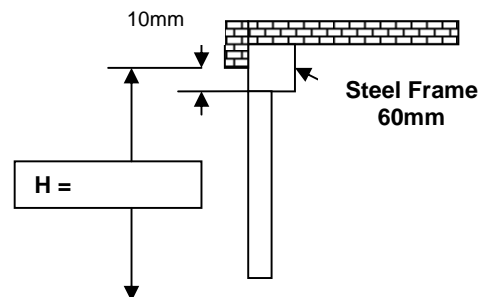

**NOTE- When viewed from the front 10mm of frame must be visible all around.**

Please enter Brickwork opening Width (W) and Brickwork opening Height (H) in the boxes.